


SPLITTER F3

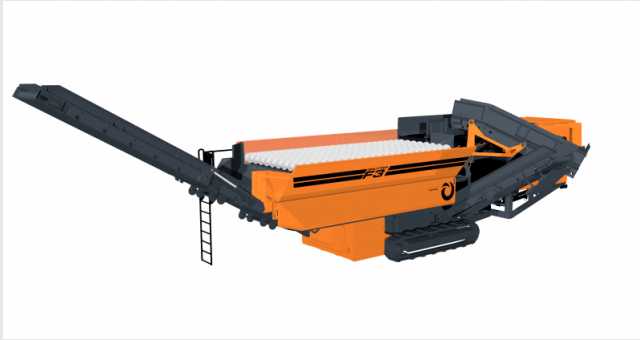

DIMENSIONS

Chassis	Steel-tracks
Total weight (kg)	32000
Length (mm)	20159
Width (mm)	10200
Height (mm)	5883
Transport width (mm)	3000
Transport height (mm)	3908
Transport length (mm)	15706

DRIVE

Engine type	Dieselegenerator
Marke	diesel-electric 80 kVA Perkins Stage 3A
Motor power (kW / PS)	63 /
Fuel tank (l)	240

CHIPPING DRUM

Length (mm)	6000
Width (mm)	2500

UPPER SCREENING DECK

Length (mm)	3000
Width (mm)	2000

Applications

Like all machines belonging to this DOPPSTADT series the SPLITTER F3 can easily cope with a variety of materials. The system is perfectly suited for pre-processed commercial waste.



Advantages

- Preparation plant in compact and mobile version
- High throughput for constant quality with throughput rates of up to 50 t/h
- Integrated NE separator and magnetic head pulleys on discharging transport conveyors
- Electrical drives with hybrid functions, powered by integrated diesel generator or electric circuit provided by the customer
- Almost clog-free operation thanks to self-cleaning process