


WIND SIFTING WS 1501

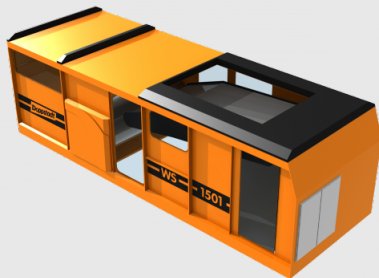

Applications

The static windsifters of the WS model range can be combined with all Doppstadt screening systems, thus forming a powerful state-of-the-art processing unit. Construction debris, C & D waste, industrial waste, bio waste, RDF, waste wood and compost are suitable input materials for this most innovative realization of substance separation by way of windsifting.

DIMENSIONS

Chassis	Static
Total weight (kg)	5500 / 5900 / 6300
Length (mm)	6877 / 8362 / 9847
Width (mm)	2505
Height (mm)	2300
Transport width (mm)	2450
Transport height (mm)	2300
Transport length (mm)	6877 / 8362 / 9847

DRIVE

Engine type	Electric Standard
Marke	AC current drive
Motor power (kW / PS)	35 / 48

SLS

Power (kW)	22
Air discharge volume	16000 m ³ /h

SEPARATION DRUM

Drive	Drehstrommotor
Drive power	1,5 kW

BLOWER UNIT

Power (kW)	30 kW
Construction type	Radialventilator



Advantages

- Modular expansion chamber allows for individual lay out design geared to specific areas of application
- Aerodynamically optimized blast-pipe system
- Infeed belt with downward buckling prevents larger scraps from mingling with lightweight fraction
- Standardized scaling of all set-up parameters
- High conveying speed ensures maximum throughput while delivering top-quality separation results